








Cre8Play's unique Rolling Hill Mound for installation in any environment, including rooftops. Specially designed to accommodate either Poured in Place rubber surfacing, (PIP), or Synthetic Turf. Manufactured with a coating of Glass Fiber Reinforced Concrete, (GFRC), for durability and a sturdy base for surfacing. Kids will enjoy running up the mound or crawling through it.



L: 14' 0"
W: 7' 6"
H: 2' 6"
1,100 LBS

Turf or PIP required on surface
and is NOT included.
(Estimate - 80 square feet)

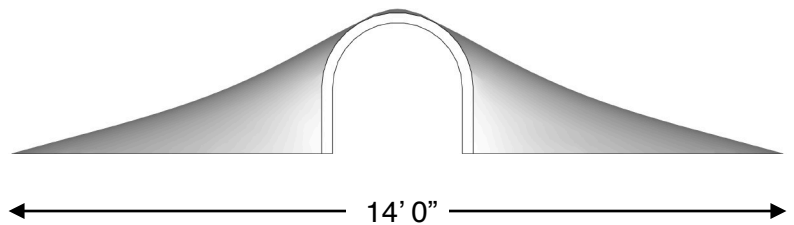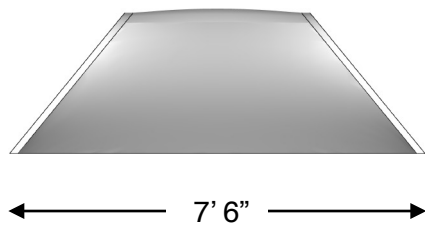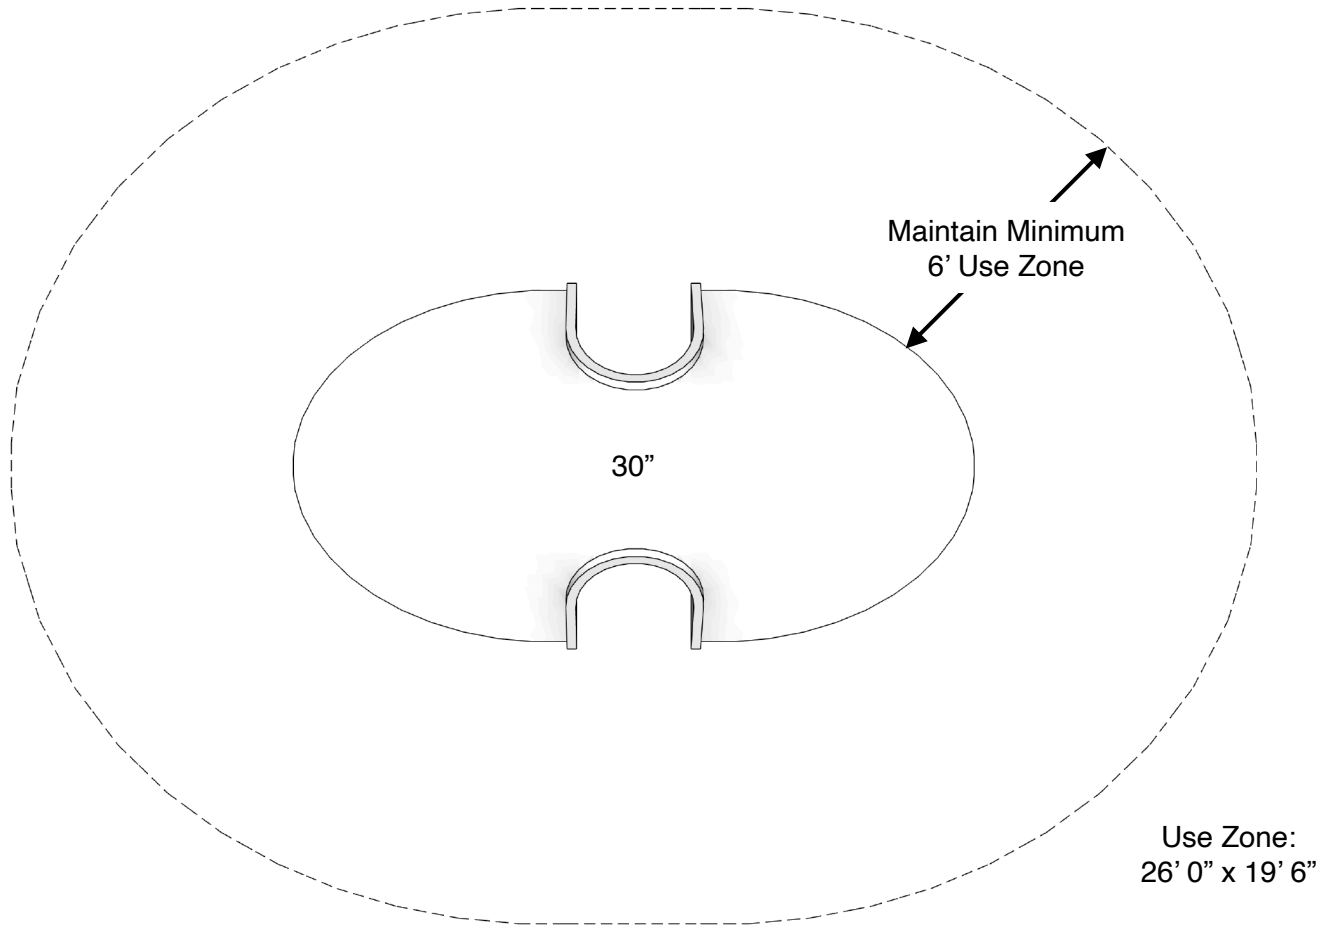

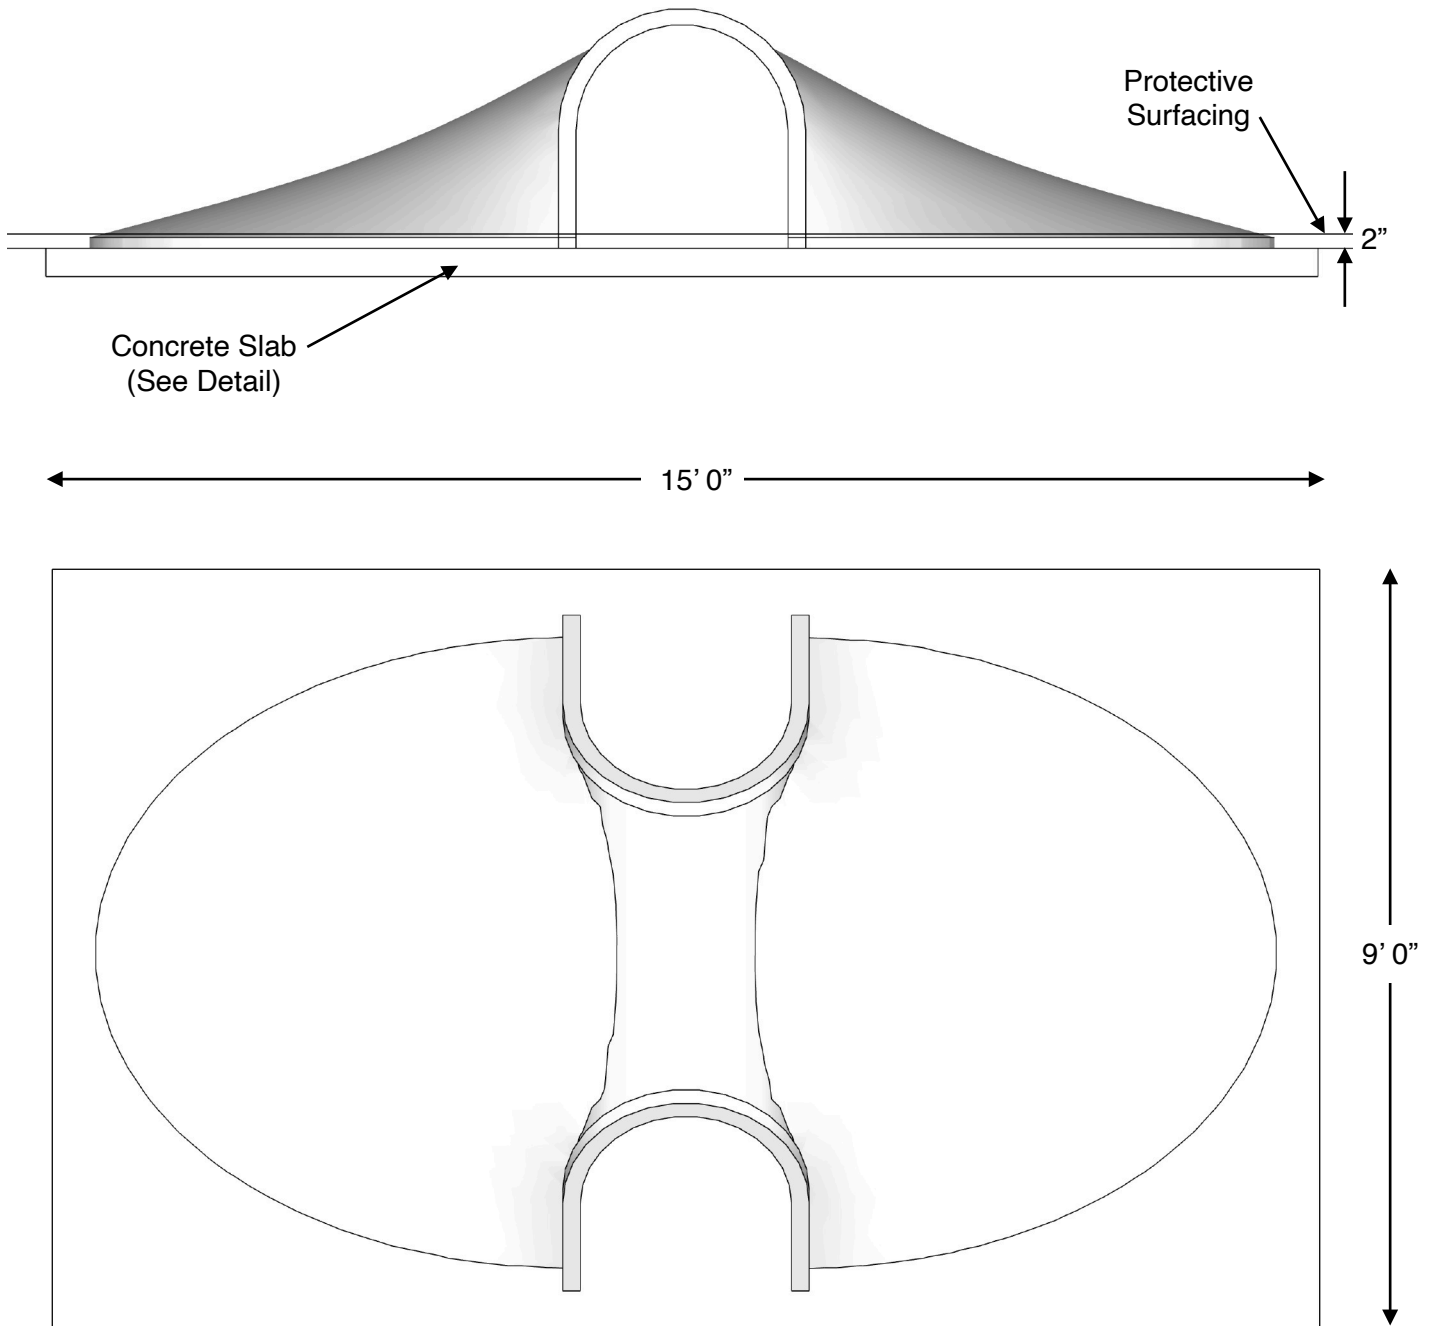

NOTE: Read installation instructions thoroughly before starting installation process.


Step 1: Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and codes. See product installation instructions for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

Step 2: Pour a concrete base for the component. Refer to the typical concrete slab section in this document. The concrete should be flush with the ground level. Allow time for the concrete to completely cure before continuing.

Step 3: Using an appropriate forklift or boom, place the crawl tunnel into final installation location. Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface around the component with a minimum use zone in every direction.

Step 4: Locate the two pieces of foam ends. Using the supplied adhesive, glue the foam ends to the concrete and crawl tunnel. With dispensing gun fully open, dispense foam with a continuous bead. Apply the beads in rows of foam, 4 inches apart. Allow the glue to dry for 24 hours before continuing.

Step 5: Install the turf or PIP surfacing to the Crawl Mound with approved impact attenuating play surface around the component.

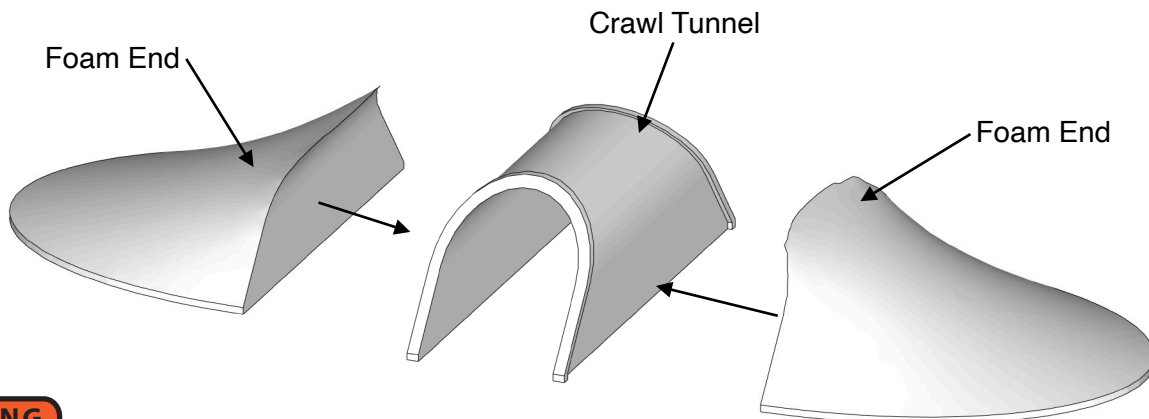


WARNING

INSTALLATION OVER A HARD SURFACE SUCH AS CONCRETE, ASPHALT, OR PACKED EARTH MAY RESULT IN SERIOUS INJURY OR DEATH FROM FALLS.

THE REMOVAL OF HELMETS, HOODS, DRAWSTRINGS, AND ACCESSORIES AROUND THE NECK IS RECOMMENDED TO PREVENT ENTANGLEMENT AND STRANGULATION.

PLAY EQUIPMENT AND/OR SURFACING MAY BE HOT.

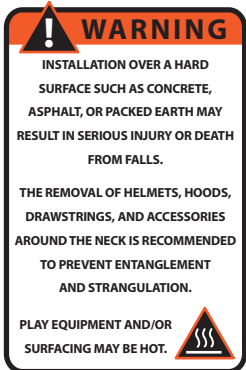

Included Items:

Item	Description	Quantity
Crawl Tunnel (750 lbs)	Play Equipment	1
Foam Ends (175 lbs each)	Play Equipment	2
Urethane adhesive	Mounting Hardware	1

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

NOTE: Always wear eye protection appropriate to the task at hand.